

# COMPACT TB



Labelling system for top & bottom application onto flat products.



COMPACT TB is available in two versions: TB-P with flat belt for application onto bags, flowpack e no-rigid products and TB-L with lateral belt for application onto jars, trays and rigid products.

- Max. speed: **up to 3600 p/hour**
- Max label width: **140 mm**
- Approx dimensions: **1650 x 1200 x 1900 mm**


EN

## STANDARD FEATURES


Double unit LABELX JR 140 EW  
Swing applicator roll  
Double start photocell  
Double conveying module with flat belt  
COMPACT main frame in painted steel  
Double horizontal and vertical microregulation unit



COMPACT TB-L conveyor module

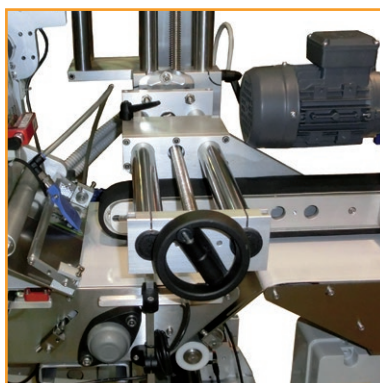

Motorised hold-down device

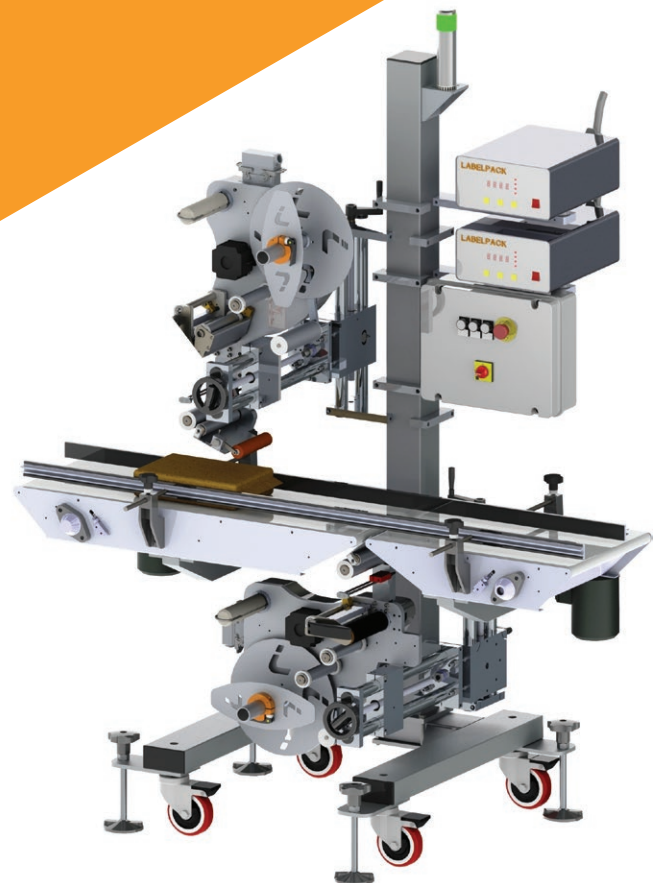

## APPLICATIONS AREAS



## OPTIONAL ACCESSORIES

LABELX JR 250 EW  
Hot foil and Thermal Transfer coding unit  
Encoder for speed synchronisation  
Pre-end of labels roll alarm  
Stainless steel COMPACT structure  
Sign lamp alarm